


SL-CP241-3
Solid State Relay Series



SL-CP241-3 □ B

10, 25, 40, 60, 80A


Load current	10, 25, 40, 60, 80A
Load voltage	24-480VAC
Control voltage	3-32VDC
Control current	DC4-20mA
On voltage	≤1.5V
Off leakage current	≤2mA
On-off time	≤10mS
Dielectric strength	2500VAC
Insulation resistance	1000MΩ/500VDC
Ambient temperature	-30~+75℃
Mounting methods	Bolted
The work instructions	LED
Weight	90g(10, 25A) 105g(40A+)

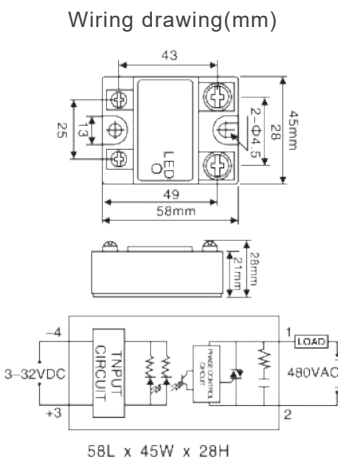

SL-CP241-3 □ A

10, 25, 40, 60, 80A

Load current	10, 25, 40, 60, 80A
Load voltage	24-480VAC
Control voltage	80-250VAC
Control current	AC≤15mA
On voltage	≤1.5V
Off leakage current	≤2mA
On-off time	≤10mS
Dielectric strength	2500VAC
Insulation resistance	1000MΩ/500VDC
Ambient temperature	-30~+75℃
Mounting methods	Bolted
The work instructions	LED
Weight	90g(10, 25A) 105g(40A+)

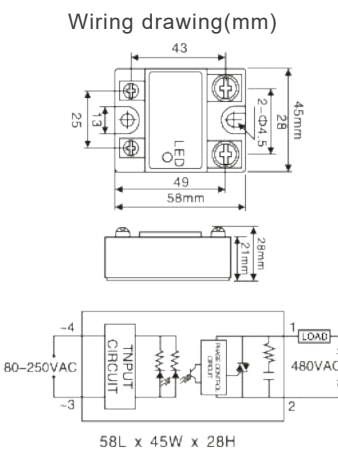


SL-CP243-3
Solid State Relay Series



SL-CP243-3 □ B

20, 40A

Load current	20, 40A
Load voltage	480VAC
Control voltage	3-32VDC
Control current	18-42mA
On voltage	≤1.8V
Off leakage current	≤10mA
On-off time	≤10mS
Dielectric strength	2500VAC
Insulation resistance	1000MΩ/500VDC
Ambient temperature	-30~+75℃
Mounting methods	Bolted
The work instructions	LED
Weight	340(460)g

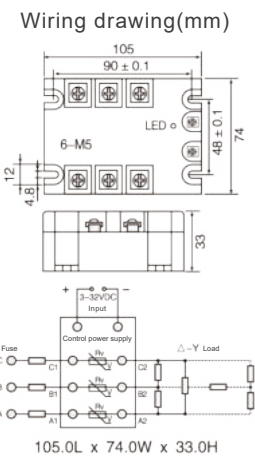

SL-CP243-3 □ A

20, 40A

Load current	20, 40A
Load voltage	480VAC
Control voltage	80-250VAC
Control current	AC≤15mA
On voltage	≤1.8V
Off leakage current	≤10mA
On-off time	≤10mS
Dielectric strength	2500VAC
Insulation resistance	1000MΩ/500VDC
Ambient temperature	-30~+75℃
Mounting methods	Bolted
The work instructions	LED
Weight	340(460)g

