SL-CP08
Isolating Switch

Function

- Isolation
- Control
- used with SL-CP01 MCBs

CE

SL-CP08/2P

SL-CP08/3P

SL-CP08/4P

Technical Data

Rated voltage	230/400 V AC, 50/60Hz
Rated current (A)	32, 63, 80,100 A
Poles	1P, 2P, 3P, 4P
Mechanical life	8,500 times
Electrical life	4000 times
Standard	IEC 60947-3
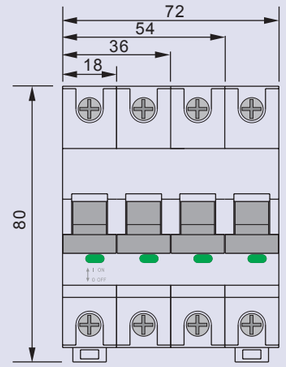
Dimensions